

## HEATED BAG INSTALLATION INSTRUCTION


The heated bag is designed for installation on the tracksleds, equipped with the steering bar switch which has the **■D<sup>st</sup>** position.



- 1 Turn the switch on the steering bar switch in "off" position.




- 2 Cut the plastic binders on the car plug outlet.

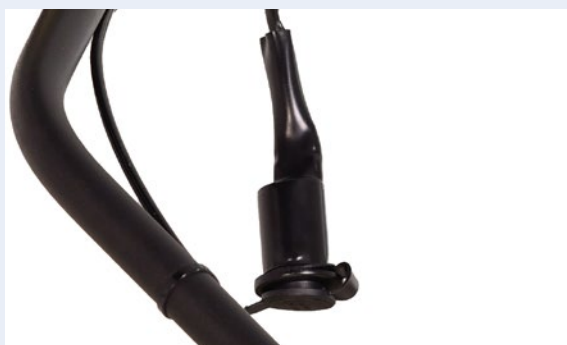

- 3 Cut and remove the heat-shrinkable isolator sleeve from the lighter outlet.



- 4 Remove the car plug outlet.

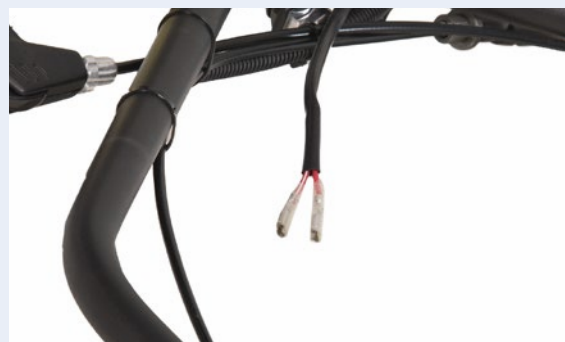

- 5 Slide the insulation off the cleats.




6 Fasten the bag to the steering bar.



7 Inert one of the wires into the cavity on bottom of the bag.



8 Insert the second wire into the bag's cavity and apply the insulation on the cleats.

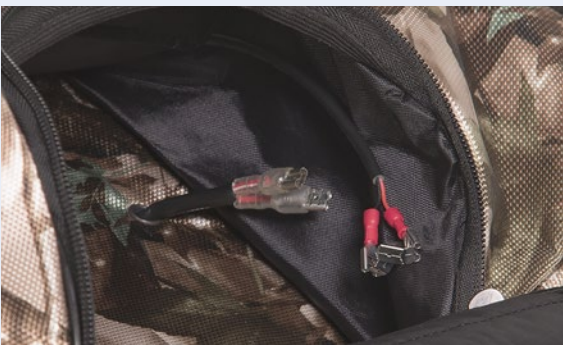

9 Connect the lighter outlet cleat with the heater cleats.



10 Connect the lighter outlet. The red wire with white stripe must be connected to the positive connector of the lighter outlet.



The heating cleats must be outside.  
The wiring cleats must be inside.

